


5.1.3 Basic Wave Optics

Some Basics

Wave optics starts with **Huygens** (1629 - 1695) and **Young** (1773 - 1829); see the [link](#) for some details. Wave optics proceeds in essentially two steps. *First*, the **Huygens principle** is applied, *second* interference between the resulting waves is added.

- **Step 1:** A wave hitting some edge or just about anything will produce a **circular wave** as shown below. The effect is easily visible when looking at water waves on some relatively undisturbed water surface with obstacles.
- **(Plane) waves** hitting an obstacle as shown below thus are detectable even in "shaded" places. Note that the circular wave would go all the way around the edge; this is not shown for simplicity. The consequences are clear:
- Even sharp edges appear always blurred if one looks closely enough. i.e. on a μm scale. This happens for any plane wave, be it light, radio waves (allowing you to receive the rhythmic noise of your choice even in the "shade" of, e.g., buildings), or electron waves (in electron microscopes). Just the lengths scales are different, going with the basic wave lengths of the wave considered.

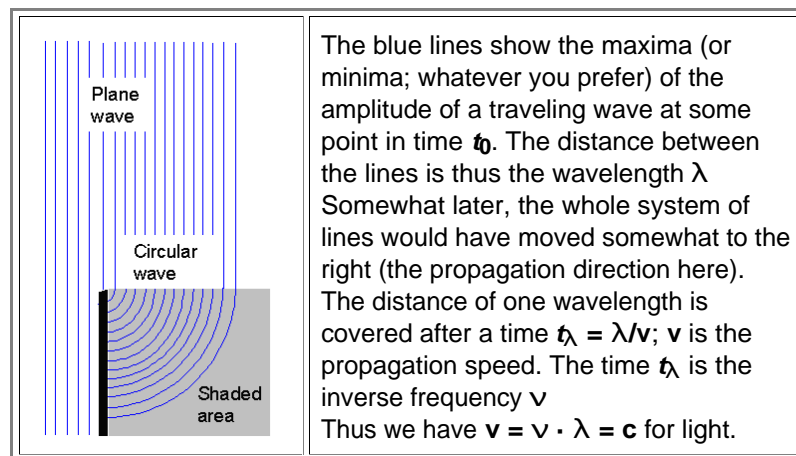


- The consequences are clear: The resolution d_{\min} of a lens with the **numerical aperture NA**, i.e. its capability to image two points at a distance d_{\min} separately and not as some blur, is wave-length limited and given by

$$d_{\min} \approx \frac{\lambda}{2NA}$$


- It's easy to see in a "hand-waving" manner why the numerical aperture comes in. Imagine some lens and reduce its numerical aperture by putting a real **opaque** aperture with a hole in front of it. The aperture edges will induce a blur that gets worse the smaller the hole and therefore **NA**. Your resolution goes down with decreasing **NA**.
- On the other hand, your **lens aberrations** become worse with increasing **NA**. The resulting conflict for optimized optical apparatus is clear and encompasses a lot of intricate and very advanced topics in optics, e.g. how to make structures on microelectronic chips with lateral dimensions around $30 \text{ nm} < \lambda$ with [optical lithography](#).

Now we consider **step 2**: two waves can **interfere** with one another. The principle as shown below is clear.

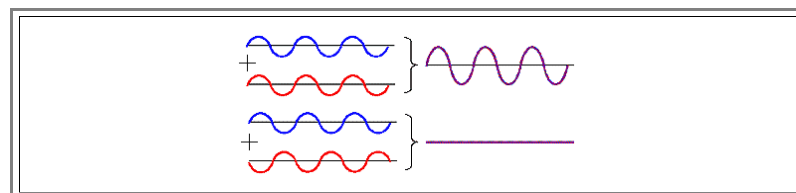

- For a **phase difference = 0** we have **constructive interference**; the amplitudes are doubled. For a phase difference = $180^\circ = \pi$ **destructive interference** "cancels" the wave; the amplitude is zero.
- The apparent **paradox** of how you can get nothing from something (where are the two single waves and the energy they carry now?) is not trivial to solve; for details see the [link](#).
- The paradigmatic experiment for showing interference effects is, of course, the **double slit experiment**. If you consider that for electron waves, and in particular just for **one** electron (or photon), you are smack in the middle of quantum theory.
- In the **wave picture** the two spherical (or here cylindrical) waves emanating from the two slits interfere to give the pattern shown below. There is no problem at all.

- In the **photon picture**, a photon (or electron) passing through the two slits *interferes with itself*. This boggles the mind quite a bit but the result is the same: You get the interference pattern as shown, with pronounced minima and maxima of the intensity, which now correspond to the *probability* of detecting the particle.

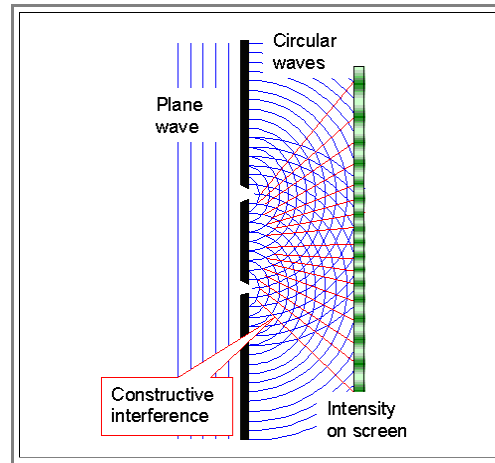



- Whenever we look at non-trivial optics, we need to consider interference effects. In the real world (as opposed to the ideal world shown in the pictures above), we need to consider the fact that our waves are almost never **mono-chromatic** (all have the same wavelength) and **coherent** (all have the same phase) plane waves extending into infinity in every direction.
- The exception is, of course, the typical **Laser** beam, where we have an (almost) mono-chromatic and (almost) coherent beam. However, a "Laser beam" is typically "thin" and doesn't extend in all directions. So it is *not* a *simple* plane wave!
- A first important conclusion can be arrived at.
- If we look at an ensemble of waves with the same wavelength, or better: with the same **wave vector** $\underline{k} = 2\pi/\lambda$ since it contains in addition to the wavelength also the **direction of propagation** (that's why it's a *vector*), we note that:

An ensemble of sufficiently many waves with the same $\pm \underline{k}$ and *random phases* interferes to exactly zero (plus some noise)

- "*Random phases*" means that all phases are equally probable. The proof of the theorem is easy: If one of the many waves has a phase α , there will be some other wave with the phase $-\alpha$ - the two will cancel. A visual proof constructed in a different context (that should be familiar) but fits just as well here is shown in the [link](#).
- From this you realize immediately that inside some hollow tube of length L that reflects waves at either end, only waves with $\lambda = 2L/m$; $m = 1, 2, 3, \dots$ can exist.
- Waves not meeting this criterion will, upon reflection at the end of the tube, produce a phase-shifted wave with some new phase, twice this phase upon the second reflection and so on. Pretty soon you have waves with random phases in there and—see above.
- What that also means is: We now have also *all* musical instruments covered, in fact everything where the term "**resonator**" comes up. This includes also the [free electron gas](#) and to some extent electrons in a [periodic potential](#) as well as the [Bragg condition](#) for [diffraction of waves at crystals](#). The list goes on. Quantum theory deals with wave functions ψ after all, and the big difference to classical physics comes from the simple fact that you let your wave functions interfere before you take the square, producing in terms of probabilities the classical equivalent of a particle.

Standing Waves

- If we look at simple waves propagating in just *one* direction, i.e. at a one-dimensional problem like sound waves inside an organ pipe, we quickly get the concept of a **standing wave**, the superposition of two plane waves with everything equal except the sign of the wave vector \underline{k} .
- First let's look at the pictures and relations below; they are only meant to refresh your memory

"Running" Plane Wave	Standing Wave
	
$\underline{E}(r, t) = \underline{E}_0 \cdot \exp\{i(\underline{k}r - \omega t)\}$ $\text{Re } E = \underline{E}_0 \cdot \cos\{2\pi/\lambda - \omega t\}$	$\underline{E}(r, t) = \underline{E}_0 \cdot \exp\{i(\underline{k}r - \omega t)\} \pm \underline{E}_0 \cdot \exp\{-i(\underline{k}r - \omega t)\}$ $\text{Re } E = 2\underline{E}_0 \cdot \cos(2\pi/\lambda) \cdot \cos(\omega t)$ $\lambda = 2L/m; m = 1, 2, 3, \dots; \text{ (a "quantum" number)}$ $L = \text{resonator length}$

The pictures and equations are true for acoustic waves, light waves or electron "waves" - just for any wave. You should know standing waves from acoustics - it's the base of any musical instrument, after all, and you *hear* them all the time.


- How about standing light waves? You ever *seen* some?
- No? So put two mirrors at some distance **L** in the **cm** range and admit some light. Are you now going to *see* a standing light wave between the mirrors, as you should expect from all of the above? No you don't - for several reasons:

- The **coherence length** l_{coh} of normal light is too short. Normal light is not an infinitely extended plane wave but has some finite "length" that is far below **cm**. You're essentially missing the extended waves between the mirrors that are superimposed and thus you can't have a standing wave. Organ pipes that are **500 m** long don't work either.
- Fine, so let's use *coherent light*, however made. OK - you will get standing waves now but you won't notice. The minimal difference in wavelength between two allowed standing waves is $\Delta\lambda = [2L/m - 2L/(m+1)]$; for large **m** this simplifies to $\Delta\lambda \approx 2L/m^2$. Since λ is in the **μm** region, and **L** in the **cm** region, **m** is around **10.000** and $\Delta\lambda \approx 10^{-4} \lambda$. In other words, the allowed wavelengths of the standing waves are so close to each other that pretty much all light wavelengths can live inside your resonator. You won't notice a difference to an arbitrary spectrum. Our lecture room here, even so it is a resonator for acoustic waves in principle, doesn't appear to produce nice musical tones because it is simply too large for acoustic wave lengths.
- OK, so let's make a resonator - two mirrors once more - but only *separated by a distance of a few μm*. Now you did it. You could have distinct standing light waves in there. But what do you expect to *see* now? Think!

- Why do you *hear* the standing acoustic waves in an organ pipe or in any (classical) musical instrument? Because some of the wave leaks out, eventually hitting your ear. The tone (= pressure amplitude inside the pipe) then would soon be gone if one wouldn't keep feeding acoustic waves into the resonator (by blowing into the organ pipe, for example). Same here. Some light must leak out so you can see it. If the leaking (and the feeding light into the resonator) is done in a certain way, we call the resulting instrument a **Laser**. We'll get back to this.

The long and short is: Yes, interference effects and standing waves are of supreme importance for modern optics and you should refresh your memory about the *basics* of that if necessary.

- The following picture shows standing light waves very graphically. We are looking at the unexposed section of a photo resist from microelectronics. The part that was exposed to light has been etched off. The ripples on the left-over resist (= light sensitive polymer) correspond to the extrema of the amplitude of a standing light wave.

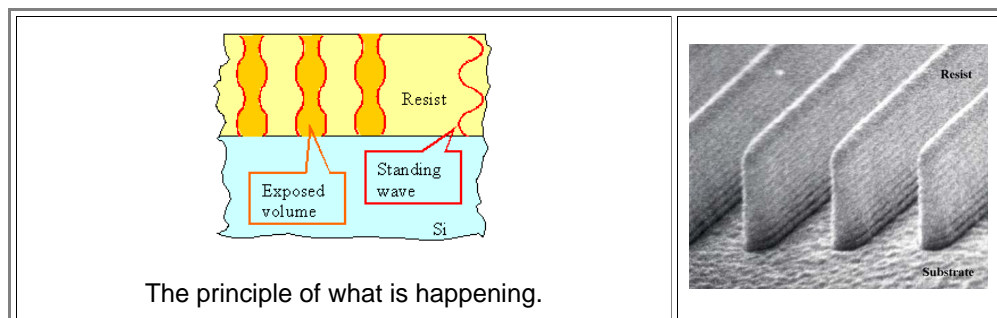

- The surface of the resist and the surface of the substrate were rather flat and only a few wavelengths apart. When light (monochromatic and rather coherent) was fed to the system, a standing wave developed inside the resist. While *you* wouldn't have seen anything special, the light intensity "seen" by the resist varied periodically with depth, and that's why the light-induced chemical changes that allow to etch out the exposed part, leave "ripples" on the side walls.
- If this is all gobbledegook to you, you need to look up "lithography" within the context of [semiconductor technologies](#).

Questionnaire

**Multiple Choice questions to 5.1.1 -
5.1.3**