


3.1.2 Stiff or Hard?

Pulling at Brittle Materials

I hope you did your [homework](#). Now let's look at the answers to the questions and see how well you did.

- Let's start with the first two questions: Ponder what basic kind of stress-strain diagram you would get while pulling at: i) a diamond rod, ii) a glass rod or any other *brittle* substance. Here is what it could look like

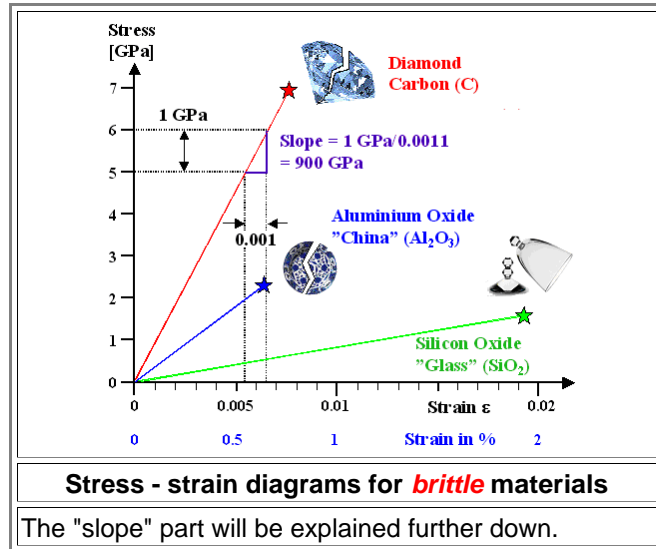

- While *my* diagram shows *numbers* on the axes, you didn't need to worry about that. There is no way you can know those numbers. I don't know them either but know where to look them up (and how to cheat a little to come up with the figure).
- What *your* diagram (with no numbers on the axes) should show are at least two straight lines. A steep and long one for diamond, and a somewhat less steep and shorter one for a glass rod or any other *brittle* substance. Let's see why you could have figured that out.

If you pull at *brittle* materials like diamonds or glass they will strain just a tiny bit while applying only small stress. So what - it is measurable, even if you don't *see* it. If the stress is doubled, the strain doubles. If the stress exceeds some limit called **fracture stress**, the material simply breaks. There is no warning in the stress - strain curve that **brittle fracture** is imminent.

- Since you probably never pulled at a glass rod you may not have experienced that first hand. But you know that when you *bend* glass - or any brittle material: It breaks without warning if you reach a small but critical deformation. Bending experiments are far more messy for calculations than just pulling or pushing experiments but qualitatively not all that different. Double the effort and bending doubles. Too much bending and fracture happens. So you could have guessed at some straight line for the tensile test.

There is more. If you release the strain at any point below the fracture stress, strain and stress go right back to zero; the arrows indicate this. In other words, the material has *exactly* the same length it had before the test.

We call that kind of response to stress "**elastic deformation**".

All brittle materials show *only* elastic behavior as long as they don't break.

Now let's see why you could have guessed that diamond has a steeper and longer line than other brittle materials.

- Diamond is the hardest material out there, you know that. That can only mean that it deforms less for equal stress than other, less hard materials. In other words, it shows less strain for the same stress than glass or china, and thus its curve must be steeper.

Why should it be longer or going to higher stresses before it breaks? Well - guess! What will be probably harder to break, everything else being equal? A piece of diamond or a piece of glass? Don't tell me you would go for glass if asked this question.

My figures actually give numbers on this behavior. First of all, those numbers show, as you suspected, that you can't elongate brittle materials much before they break. Then we have something like a maximum stress for fracture of 7 GPa or seven Giga Pascal or $7 \cdot 10^9$ Pa. How much is that in everyday terms? Well, imagine me in drag. If I borrow my wife's high heels and put all my weight on just one heel, the stress is about 10 MPa. We need about hundred guys like me on a 1 cm^2 heel, or a pin-head sized 1 mm^2 heel with me alone, to produce 1 GPa.


I've already admitted that I cheated a little on two points, so now I'm going to confess. First, materialwise, there is simply no such thing as "glass" or "china". There are many different kinds of those materials, and they all differ somewhat in their behavior. The curves given are thus typical but not specific. Some other glass or china specimen might show quite different curves. Nevertheless, the diamond curve is always steeper and longer than the china curve,

and so on.

Second, nobody in her right mind would do a *tensile* test with brittle specimen. For starters, they would already break when you clamp them into the machine. Moreover, even if you manage to do that with some kind of tricks, they would fracture at values that are not characteristic for the material but just for the quality of its *surface*. In real life we therefore do *compressive* tests for those materials, and the numbers I used come from compressive tests, indeed. But in a *thought experiment*, where you don't need to worry about the boring problems just described because you can imagine ideal surfaces and ideal clamping, the curves would come out as shown.

Now let's proceed to the third task: Ponder what basic kind of stress -strain diagram you would get while pulling at iii) a rubber band (let's see if you remember).

- In the figure below I look at rubber *once more*. Rubber at room temperature can be strained a lot *and* behaves always fully elastic. Stop pulling and it always resumes its original length. But in contrast to diamond and glass, or just about all the "common" brittle materials, it gives you a *fair warning* when it is about to break: it's stress - strain curve deviates from a straight line and goes "up". After pulling it to a considerable length, it rather suddenly feels that it will "give" no more. That simply means that you now have to apply far more stress to induce a bit more strain. If you ignore that warning and increase the stress, it breaks.

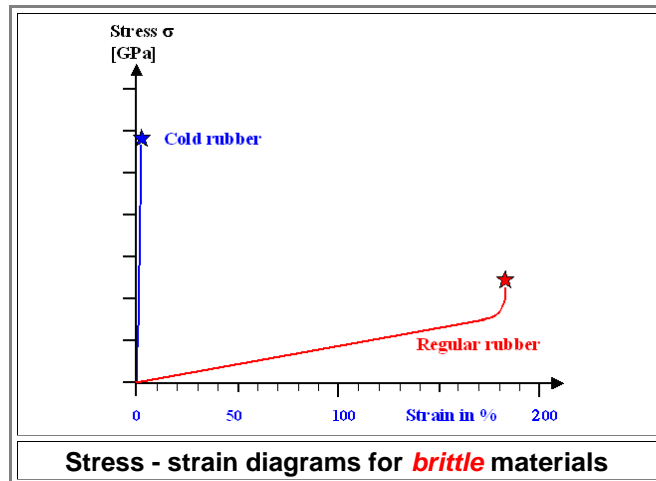

In the figure above I also included the stress - strain diagram you would find at (very) low temperatures. Rubber than behaves pretty much like glass or other brittle materials.

- I did not expect you to know that. However, you may have seen experiments where somebody puts a rubber hose, a flower, or some other soft stuff into some liquid nitrogen and then shatters the cold things to a million pieces by hitting them with a hammer. So what, you might have thought, the stuff now is frozen and everybody can shatter ice with a hammer, while it's not possible with water (in bags). You're right as far as flowers are concerned but not as far as rubber and its relatives are concerned. There is no water inside rubber that could freeze. The "low temperature embrittlement" of rubber led to the 1986 space shuttle "Challenger" disaster, by the way. What is going on in inside rubber when you pull at it would be a fascinating tale on its own but since we are not overly interested in rubber swords, I'll drop this subject right here. However, I will not drop the "[low temperature embrittlement](#)" of steel, when I get to it!

Some First Conclusions

Let's describe brittle behavior in other words. Brittle materials are not given to *permanent* or **plastic deformation** (besides fracturing). You cannot give brittle materials a different shape by pulling or pushing at them.

- We all know that. Nobody sober has ever tried to convert a beer *glass* into a wine glass by banging it with a hammer. With a metal beer *goblet*, things would be entirely different. Let's put that in large print:

**Brittle materials deform only *elastically*
and never permanently or *plastically*.**

Now let's generalize a bit. When you bang things with a hammer, or squeeze them with pliers; when you pull at your hair or kick your ... (*insert the target of your choice*), you are doing a deformation experiment. It's just a very unscientific experiment because you stress an irregular specimen in an irregular way. It is nevertheless a deformation experiment.

- Your specimen will react to whatever *local* stress it feels by experiencing *local* strain. The kicked object will feel a lot of stress wherever it's contacted by the tip of your boots and not much (physical) stress anywhere else. It will respond with a lot of strain at that point and react to that by some deformation (and, if your specimen is an animated object, by making noises and kicking back).

Let's formulate a simple but important truth:

**Any deformation can be calculated by
considering the *local*
stress - strain conditions**

- Note that I did not say "easily calculated". It is in fact a rather difficult task. Nevertheless, if you break your diamond in a (virtual) tensile test or by banging it with a hammer, the material "diamond" responds to the acting stress via its specific properties that describe this material. And so does your sword.

The next thing to note is that temperature must be considered, the rubber example demonstrates that rather dramatically. On the other hand, our brittle materials from the first tasks do not change their behavior very much with temperature.

- All I want to do here is to make you aware that temperature might be important. Some materials like rubber (and possibly your sword) become far more brittle at low temperatures, others like glass or silicon (Si), lose their brittleness at higher temperatures and become *viscous* or *ductile*. This will be of major importance for what follows.

Maybe you noticed that so far I did not bring up the "*strain rate*" that I used for our virtual experiments. Strange, considering that I made [such a fuss](#) about that in the preceding subchapter.

- Well, it turns out that for the experiments we did so far, the strain rate doesn't matter much. We get essentially the same curves for different strain rates, just believe me on this. It is nevertheless important that you do the experiments in a well-defined way.

Some space above I made a big deal about the *length* and the *slope* of the straight lines describing the elastic deformation of brittle materials. That are, of course, the two properties that distinguish different brittle materials. We sure must look at this in more detail.

Fracture Stress and Young's Modulus

Let's start with the "length" of the stress - strain curve. It simply tells you where the curve ends or, in other word, at what stress and strain the material breaks.

- Great. Let's define a *fracture stress* and a *fracture strain* for the material in question and tabulate it as an intrinsic and important property of that material. Well - no, let's not! As [hinted at above](#), fracture of real brittle material occurs for all kinds of reasons that are *not* properties of the material itself. You cannot shatter your car window glass by banging it as hard as you can with a hammer (try it). Then scratch it just a tiny little bit with something hard like the diamonds in your ring, and it will now fracture immediately on the slightest impact. That's why you have these little hammer in busses and trains with a very hard tip to scratch and shatter the windows in an emergency.
- I will have a lot to say about fracture in modules to come. Here we just note that tensile (or compressive) tests (done right and with all kinds of tricks) will give you only a very rough idea about the fracture properties of materials and that is why I won't go into that any more.

So let's look at the *slope* of the stress - strain diagrams. As long as we have straight lines, the slope is the same everywhere and that's why we will give it a name:

**Slope of a stress - strain curve
= Young's modulus**

- How one measures a slope is shown for the diamond curve in the [top figure](#). Draw some triangle to the curve as shown and divide the length of the vertical part by the length of the horizontal part. As long as you do that with a straight line, it obviously doesn't matter how large the triangle is. For diamond, a Young's modulus of 125 GPa results.

● **Young's** modulus is also called *tensile modulus*; or a bit sloppily *elastic modulus* or **modulus of elasticity**. The sloppiness comes from the fact that there are *several* elastic moduli for a given material. Young's modulus is just one of them but the most important one.

● By the way, if you know the least little thing about calculus, you realize that the definition above applies to *all* curves, not just straight lines. If calculus is not something you know and enjoy, forget this remark.

▶ The five curves in the two figures above represent substantial differences with respect to **Young's modulus** of the materials tested. For the first three curves you can derive Young's modulus yourself, for the rubber case you can't because I didn't give numbers on the axes'. What you can appreciate, however, is that Young's modulus of cold rubber is much larger than that of rubber proper. It can easily be more than 1000 times larger!

▶ Young's Modulus is instrumental for the **stiffness** of your blade, so we need to look at it in some detail. Let's re-express the definition from right above:

**Young's modulus measures how much stress
it takes to deform a material by 0.01 %**

● Young's modulus thus describes a *special* stress and thus is given in units of stress = force per area. It is typically given in "[Gigapascals](#)" or **GPa**, meaning one billion (= 10^9 = Giga) Pascals. Pascals are force (= Newton = N) per area. I [covered that](#) already but I promised repetitions.

● Materials with a *large* Young's modulus take a *lot* of stress to make them a bit longer, materials with a *small* Young's modulus elongate easily. The same is true for bending something elastically.

As ascertained before, Young's modulus is directly related to the **slope** or the steepness of the curve in a stress - strain diagrams or their *derivative* in mathematical terms. Now I have used the d-word. Since the "derivative" (of a function) is a dirty word for many, I will not go on but refer the brave to the [science module](#) that deals with the issue.

The simple rule is: Steep curves relate to large Young's moduli, flatter curves to smaller ones as shown in the figure above. Rubber at room temperature has an extremely small Young's modulus.

[Science
Link](#)

Tensile test

Characterizing Materials by Their Young's Modulus

▶ Now that we have characterized materials by their Young's's modulus, we need a *name* for the property assessed in this way. What would *you* call the property described by Young's modulus?

- *Toughness*? No! That word we have already equated with [ductile](#) behavior.
- *Hardness*? Nice try! A diamond has a larger Young's modulus than glass and is harder, indeed. So thanks - but no! Hard materials tend to have a large Young's modulus but there is no direct relations. Young's modulus has not much to do with what we call hardness and measure with hardness tests.
- *Elasticity*? Wouldn't you rather reserve that word for assessing how *much* you can *elastically* elongate or bend something, and not for how much force you have to apply for elongating / bending?

Let me help you:

**We call the *material-specific* property measured by Young's
modulus:
Stiffness**


- Note right away that what *you* would conceive as the **stiffness of your blade** is probably not the same thing as what I introduced here. What you might see as the stiffness of your blade depends on *two* completely unrelated things:
 - The *specific* stiffness of the material it's made from, or Young's modulus of the material, or what I consider as stiffness *only*, and:
 - The precise cross-section of your blade, or a purely geometrical parameter.
 A thick broad blade is "stiffer" of course than a thin and slender one, even so the material for both has the same stiffness. The dependence of blade stiffness on geometry is "*trivial*", however, from a materials point of view. It is just a number you need to get and then it is trivial to use. It's not quite so trivial, however, to calculate that number. I will deal with that [here](#).
- The important thing is to realize and remember that "*stiffness*" as described by the numerical value of Young's modulus has nothing to do with *fracture strain*, *hardness* or *ductility*.
- So a material with a large Young's modulus we would call very stiff material. It might be hard, too, but you cannot derive the hardness from a known stiffness, just as you cannot tell if a material is silvery or red from knowing its stiffness. It's just not the same.

Now to the next problem:
- The word "stiff" is used when we describe a large Young's modulus or a high degree of stiffness. So what do we call a material with a *small* Young's modulus like rubber?

Soft? No!

 - Soft is the opposite of hard—and not the opposite of very stiff.

I must admit that there is no good name for that. Pick what you like, for example *docile*, *pliant* or *resilient*. On second thoughts, be careful about **resilience**. That name is already taken for the ability of a material to absorb energy when deformed elastically.
- What I'm driving at is that you should be careful about what is meant if somebody uses well-known everyday words like "strong", "hard", "tough", "stiff", "resilient", or "soft" for describing mechanical properties of a material. It's often not good enough and prone to cause confusion.
- Just to remind you that this is a scientific article, albeit without equations and fancy language, I will give you now an idea about numbers for Young's modulus. In science we like to be **quantitative**.

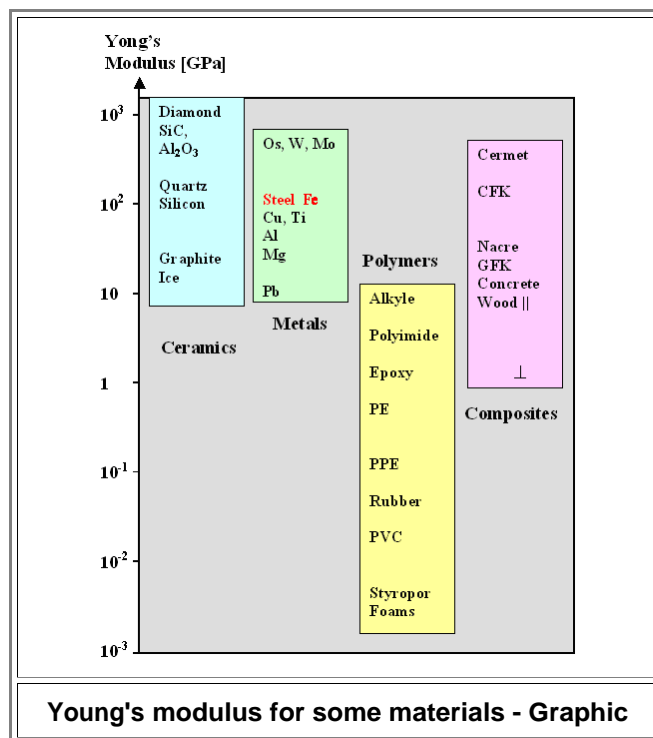

Material	Diamond	WC	Al ₂ O ₃	Al	Bronze Brass	Concrete	Glass	Iron Steel	Fe ₃ C
Y (Gpa)	1220	≈600	435	69	95 - 1120	≈20	50 - 90	190 - 210	≈200

Young's modulus for some materials - Numbers

What you see is that, yes, **hard** materials like diamond or tungsten carbide (WC), taking "hard" for the time being in the regular sense of the word, tend to have a large Young's modulus. But there are still big differences.

- Diamond (C) and Tungsten carbide (WC) are both very hard and both have large but substantially different Young's moduli. Sapphire, also known as Aluminum oxide (Al_2O_3 , the hard little crystals on emery paper that scratch most materials when you "sand" them), is also quite hard but has an even smaller Young's modulus.

- Polystyrene ("Styropore") as one representative of the large number of polymers out there is soft and has a very small Young's modulus.

So, yes again. There is a certain common trend between stiffness and hardness. But, once more, it is **not** the same. Far from it—as we will see in the context of swords right below.

First, however, I must address the question you might have. So you wouldn't have thought of polystyrene, or iron (Fe), magnesium (Mg), steel, rubber and so on as being **brittle**? So why did I assign a Young's modulus to them, considering that we are discussing only brittle materials at that moment and that I only defined Young's modulus as the slope of the stress-strain curve of brittle materials?

- If you really ask that question you didn't do your homework - or you got it wrong. I'll come to that in a minute.

Now you must, I repeat **must** note something quite relevant to our topic here:

Pure and rather **soft iron has the **same**
Young's modulus or stiffness as **hard** steel!**

- All steels have the same specific stiffness! I just claim this without giving a reason. Do you believe me? Yes? You're a sucker. You should believe me, of course, but not without asking: **why**?

Why do all steels have the same specific stiffness?

I'm going to tell you why it can't be otherwise - but not before [chapter 4.1.3](#).

Let's look at some other materials in the figure above. **CFC**, short for **carbon fiber composite**, the stuff of modern airplanes, tennis rackets and Formula 1 cars, has a relatively large Young's modulus compared to **GFC**, **glass fiber composites**, the stuff for boat hulls, swimming pools, and so on. **Wood** has a small Young's modulus and tooth enamel and **nacre** (= mother of pearl) are doing fine compared to magnesium or polymers. Both consist of high-modulus calcium phosphate or calcium carbonate, respectively, encased in a low-modulus matrix of bio-polymers or **proteins**.

- Aha - we are talking **composite properties** here. Young's modulus of the composite materials given in the table is some average of the moduli of the components and often much larger than that of the low-modulus matrix.

Pattern welded "damascene" sword blades are usually conceived to be composite materials of **hard** and **soft** steel. It's not quite true and in any case both steels have the **same** Young's modulus. Now you should wonder what advantage this composite technique offers. It is certainly **not** an improved stiffness of the blade.

- Now don't forget: we are talking Young's modulus here, **not** hardness. When we **bend** a blade elastically, Young's modulus (and its shape) tells us how difficult that is going to be. We always hope that it deforms exclusively elastically since the only other options are breakage or plastic deformation (staying bend) and we hate that.

Bend? By now I have used a new if familiar term several times for a special kind of deformation. It's time to look at it a bit more closely.

So far I just discussed mainly tensile testing, straight pulling or pushing. Specimen got longer or shorter but they did not bend. This gave us Young's modulus. But what does Young's modulus have to do with bending?

- Relax. Even so I do not give equations here, you realized; I hope, that with Young's modulus it is fairly easy and straightforward to **calculate** what would happen to a specimen if you **pull** or **push**.

It is just as possible, if far less straightforward, to calculate what would happen elastically to a specimen if you try to bend it or to mutilate it in other way—as long as you know its Young's modulus (and its shape, of course).

Now comes the "tough", "hard" or "stiff" **question**: How does a pattern-welded Celtic "damascene" blade, or a hard-soft-hard cross-section Japanese sword blade, bend elastically when compared to a geometrically identical blade that is made from uniform soft or hard steel?

- The **answer** shouldn't surprise you anymore: All blades with the same cross-section bend pretty much the same way.

Since elastic deformation for a given shape concerns **only** Young's modulus, and since Young's modulus is the same for all kinds of iron and (carbon) steels, there is no appreciable difference.

So what's the advantage of damascene and other tricky techniques? It cannot influence a sword's stiffness and thus its bending behavior.

- We have a really tough (sic) question. The answer has to wait for quite a while. First we need to look at your remaining assignments. This quick [reference module](#) might help